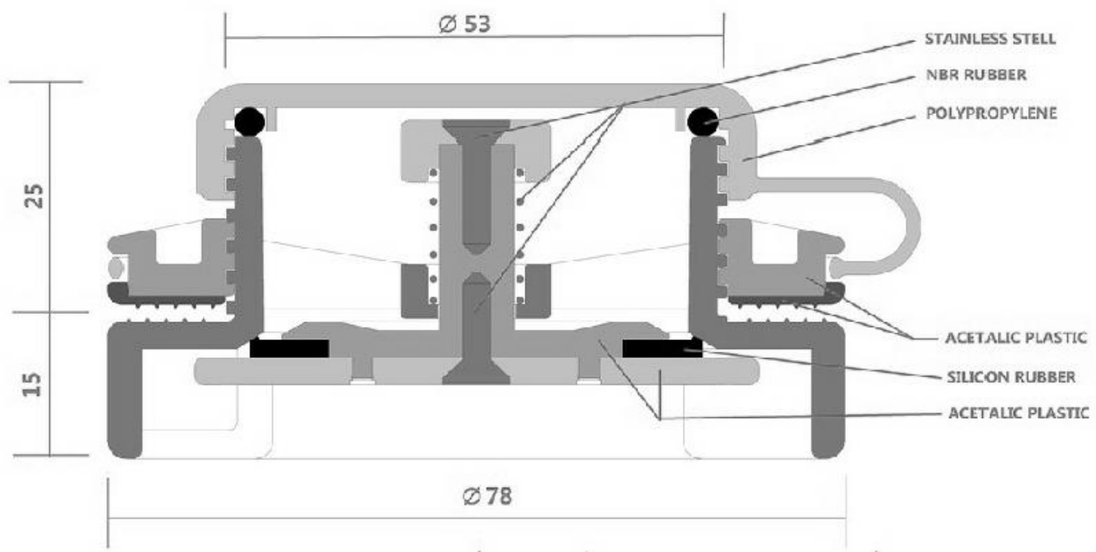

INSTALLATION

1. HOLE REQUIRED FOR VALVE INSTALLATION = Ø47±0,5 mm
2. TIGHTENING TORQUE = 30 Nm
   THE VALVE ASSEMBLY SHOULD BE RE-TORQUE ATLEAST AFTER HOURS
3. THE USERS RESPONSIBILITY TO ENSURE THAT ANY FLUIDS USED DURING THE INSTALLATION OR OPERATION ARE COMPATIBLE WITH THIS VALVE
4. PRESSURE SETTING AVAILABLE IN THE TABLE ATTACHED

APPLICABLE STANDARD

ISO 15738:2002(E)

-ART. 725/ A942040N
Key for valve BRAVO 260 H.V.

Item	Part number	Material	Colour
BRAVO 260 H.V.	VG3N0001	POM	nero/black

Progettato	Controllato	Cod. Componente	Data	Materiale	Massa
GG	AA	see table	18/01/2021		

SCOPREGA

BRAVO 260 H.V.

	Edizione	Foglio
VG3N0001	00	1/1